


*Single or Two Stage — Electric or Gasoline*

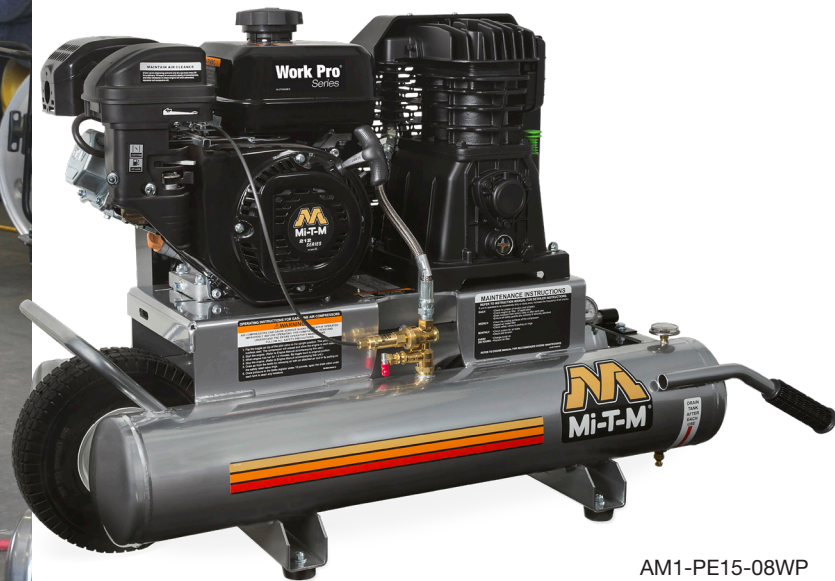

AM1-PE15-08WP

*Popular because of its size, the Work Pro Series 8-gallon electric or gas driven air compressor comes in either single or two stage. Capable of powering everything from impact wrenches and nail guns to paint sprayers and staplers, this unit is extremely portable.*

**Compressor Pump:**

Splash oil lubricated aluminum crankcase | Stainless-steel braided discharge hose | Oil level sight indicator

**Motor:**

Thermal overload motor protection

**Frame:**

Powder coated 8-gallon twin tank receivers | 3/16-inch base plate to reduce vibration | 16-gauge powder coated two-piece belt guard | 10-inch flat-free tire (Two stage models have two tires)

**Components:**

Regulator and two gauges for tank and outlet pressure | Drain and pressure relief valves | Fly wheel | Industrial-grade pressure switch (Electric model) | Quality pilot valve unloader (Gasoline models)



AM1-PE15-08WP

# Work Pro® Series

## Air Compressors – Single or Two Stage – Electric or Gasoline

ELECTRIC MODEL								
MODEL NUMBER	CFM @ PSI	HORSEPOWER/MOTOR	COMPRESSOR	TANK SIZE	PLUG TYPE	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
AM1-PE15-08WP	7.3 @ 90	1.5 HP, 115V, 13.2A	Single stage, aluminum	8-gallon	NEMA 5-15P	44.5x18.5x25in.	160 lb.	140 lb.
GASOLINE MODELS								
MODEL NUMBER	CFM @ PSI	DISPLACEMENT/ENGINE	COMPRESSOR	TANK SIZE	ENGINE IDLE CONTROL	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
AM1-PH06-08WP	9.0 @ 90	196cc Honda GX200 OHV	Single stage, aluminum	8-gallon	Pneumatic	44.5x18.5x27in.	160 lb.	135 lb.
AM1-PM06-08WP	9.0 @ 90	212cc Mi-T-M OHV	Single stage, aluminum	8-gallon	Cable throttle	44.5x18.5x27in.	160 lb.	135 lb.
AM1-PH65-08WP	13.9 @ 90	196cc Honda GX200 OHV	Single stage, aluminum	8-gallon	Pneumatic	44.5x18.5x27in.	170 lb.	145 lb.
AM1-PM65-08WP	13.9 @ 90	212cc Mi-T-M OHV	Single stage, aluminum	8-gallon	Cable throttle	44.5x18.5x27in.	170 lb.	145 lb.
AM2-PH09-08WP	17.2 @ 175*	270cc Honda GX270 OHV	Two stage, aluminum	8-gallon	Pneumatic	44x26x31in.	200 lb.	175 lb.
AM2-PM09-08WP	17.2 @ 175*	300cc Mi-T-M OHV	Two stage, aluminum	8-gallon	Pneumatic	44x26x31in.	200 lb.	175 lb.

\*Equipped with 150-PSI maximum rated regulator.

### Options:

PART NUMBER	DESCRIPTION	FITS MODELS
AX-0002	Auto drain/regulator/plastic bowl - Drains moisture from air system	AM1-PE15-08WP
AX-0003	Manual drain/regulator/metal bowl - Drains moisture from air system	All models
AX-0015	Electric start - battery and cables not included - For easy starting	AM2-PH09-08WP
IX-0055	Remote start/choke - 6-ft. wire extension for key switch. You will also need to order electric start option, AX-0015.	AM2-PH09-08WP
IX-0059	Remote start/choke - 6-ft. wire extension for key switch, sealed cable. You will also need to order electric start option, AX-0015.	AM2-PH09-08WP

### Accessories:

PART NUMBER	DESCRIPTION	FITS MODELS
70-0357	Engine oil drain extension - 14-inch flexible drain hose makes oil changes easy and clean	Single stage models
70-0358	Engine oil drain extension - 14-inch flexible drain hose makes oil changes easy and clean	Two stage models
AW-6000-1002	Equipment cover - Keeps your equipment clean, dry and looking like new	All models



NEMA 5-15P,  
15-amp plug

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).